Lightweight framed formworkVARIMID

Tried and tested system designed for forming where use of a crane is limited.

The lightweight framed formwork Varimid by SALESBRIDGES is a complete system including accessories, which delivers perfect forming performance on construction sites with limited use of a crane. High loadbearing capacity and long service life of the Varimid system makes it an cost-effective solution.

High load-bearing capacity:

- 60 kN/m² pressure of fresh concrete up to 3.00m
- Can be vertically stacked up to 6.00m with use of one joint.
- High quality film faced plywood with thickness of 15mm. Film weight 240g/m2

Cost-effective

- Manhandled formwork panels minimize use of a crane.
- High number of use cycles means lower followup expenses.
- Reduction of expenses by means of restoration and cleaning possibilities.
- Galvanized or powder-coated steel frames, for long service life.
- High quality of concrete surface minimizes finishing work.

Easy handling and planning

Alltheconnectorsandaccessoriesareeasily fixed into the slots and quickly tighten, consequently forming time is efficient and maximized.
The ingeniously coordinated panel widths permit optimum adaptation to any structure

Safe use

• Accessories such as — lifting hooks, wall brackets, supporting struts etc. make for save and easier handling of the system.

Areas of use of the Varimid system:

- Wall formwork
- Column formwork
- Foundation formwork






VARIMID panels


The heights and widths of the Varimid panels result in a logical and advantageous increment-grid. Small amount of different panels' sizes makes planning easier and forming faster.


- 8 widths of panel
- 4 heights ofpanel

For any type and size of the panel two options of covering are available.

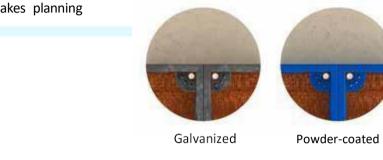


STANDARD PANELS

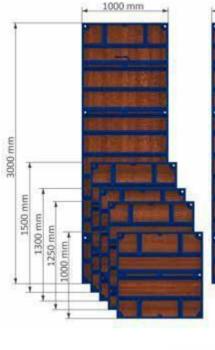

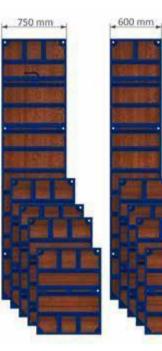

1000 mm


750 mm



VERSATILE PANELS


The special hole pattern makes these panels particularly suitable for efficient forming of:

- Corners
- Wall junctions
- Stop-ends
- Columns

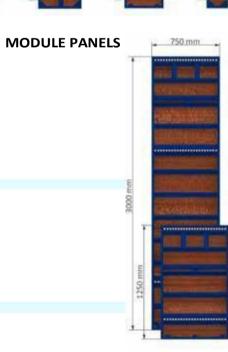

STRIPPING CORNER

The Varimid stripping corner was specifically designed for use with shaft formwork . It enables the formwork to be closed and opened in accordance with accident protection regulations, i.e. without using the crane, simply by operat-ing easy-to-turn spindles with a reinforcement rod or the convenient ratchet. It is then lifted and reset in one piece, thus saving crane-time. The Varimid stripping corner is also suitable for use on pilasters and as an inside corner on wall formwork.






WALLFORMWORKSYSTEM

VARIMID panelconnection

JOINING

Thanks to a continuous slot placed all along the panel's profile, the Varimid clamp device can be installed in any desired point, simply with a blow of the hammer. This makes assembly super-fast and no special toolsrequired.



CLOSURES

Closures are intended to be used for places where formwork cannot be stroke easily. Filled with construction timber, tighten with use of an adjustable clamp device.

SALESBRIDGES BV

SALES@SALESBRIDGES.NL

VARIMID

WALLFORMWORKSYSTEM

tem		[kg] Ar	rticle no	ltem		[kg]	Article no	Item		[kg]	Article no
indard panel Varimid	1000x3000mm	131.25	12100000	Multipurpose panel Varimid	750x3000mm	111.30	12108000	Guide plate	0.9 m 1 5 m	12.18	11912000 11914000
	750x3000mm	107.00	12 110 000		750x1500mm 750x1000mm	62.40 43.00	12208000 12308000		1.5 m	19.95	11914000
	600x3000mm 500x3000mm	85.15 80.85	12 112 000 12 114 000		/ 20X100000000	45.00	12508000				
	450x3000mm	73.50	12 116 000						\$		
	250x3000mm 1000x1500mm	60.90 73.17	12 118 000 12 200 000					All A	Į		
	750x1500mm	59.35	12 200 000								
	600x1500mm	46 41	12 212 000					Cornerguideplate	600x600	16.50	11 916000
	500x1500mm 450x1500mm	43.85 37.02	12214000 12216000								
ns available:	250x1500mm		12 218000								
<pre>x 000-Powder coated; 100-Galvanized;</pre>	1000x1000mm	48.48	12 300 000	Options available: xx xxx 000 - Powder xx xxx 100 - Galvanized;	coated;						
200 - Hot Dip Galvanized;	750x1000mm 600x1000mm	39.70 34.60	12 310000 12 312000	xx xxx 200-Hot Dip Galvanized;							
tom size on inquiry;	500x1 <mark>000</mark> mm	29.55	12 314000	Custom size on inquiry;				Adju Adju Adju	120	4,95	12712100
	450x1000mm		12316000	ExternalangleVarimid	117x3000mm	39.38	12614 000				
	250x1000mm	19.22	12 318000		117x1500mm	20.05	12624000	- Crub			
satile panelVarimid	900x3000mm 750x3000mm		12102000 12106000	ĥ	117x1000mm	13.08	12634000				
	900x1500mm	71.90	12 202000					Clamp device Varimid		2,00	12710100
	750x1500mm	65.42	12206 000								
	900x1000mm 750x1000mm		12302 000 12306 000								
	7307100011111	-0.05	12300 000								
				置				Contact device		1,40	1191810
				Options available: xx xxx 000 - Powder	coated:						
				xxxxx200-HotDipGalvanized;							
nsavailable:xxxxx000-Powder < 100 - Galvanized;	coated;			Custom size on inquiry;							
200 -Hot DipGalvanized;				Internal angle Varimid	250x3000mm	74.55	12 610 000	Correctionscrew	10–16cm	0,65	11908100
omsizeoninquiry;					250x1500mm	39.13 25.19	12 620 000	a anton	10–25cm	0,70	11910100
enderanelVarimid	900x3000mm	131.53	12 104000		250x1000mm	25.19	12 630000				
	900x1500mm		12204000								
	900x1000mm	53.68	12 304 000					Stop-ord tie Varimid	265mm		
				単式的				Contraction of the second s	415mm	1.50	12715100
				山田田				and the second se			
				Optionsavailable: xxxxx000-Powder	coated;			Lifting ok Varimid	0,5t	7,25	12 718000
nsavailable:xxxxx000-Powder	.coated.			xx xxx 200 - Hot Dip Galvanized; Customsizeoninquiry;				(A)			
x 100 - Galvanized;	coateu,										
x 200-Hot DipGalvanized; m size on inquiry;				JointangleVarimid	250x3000mm		12 612000				
		10.70	40 704 000		250x1500mm 250x1000mm	48.71	12 622000 12632000	Supporting strut 250		21,85	1272210
ansion block Varimid	1000	19,76	12 704 000					Provide the second seco			
*	3000	54,14	12 700 000								
								/			
								- 1			
he he he he											
ons available: xxxxx000 - Powde	er coated:			Options available: xx xxx 000 - P	owder coated.			1 pr			
x xxx 200 - Hot Dip Galvanized;				xx xxx 200 - Hot Dip Galvanized;				N. C.			
tom size on inquiry;				Custom size on inquiry;							

+31652883848

VARIMID

Item		[kg]	Article no		
Wall bracket Varimid		12.30	12720000		
Ч					
Sup		35,60	11928100		
Supporting Strucs40		55,00	11320100		
4					
M					
Ŵ					
and the second s					
¥.					
Supporting strut 540		54,20	11930100		
Supporting Strut 540		54,20	11950100		
\mathbb{N}					
N A					
N.					
Superplate 15.0	15	1.22			
Star-shaped nut		0,38			
		0,00			
Plasticcone	22 32	0,005 0,008			
	52	0,000			
Plastic tube 2,5m		0.45			
Flashe tube 2,511		0,45			
	15.0mm 0.50m	0.80	92 050 300		
	15.0mm 1.00m	1.60	92 100 300		
	15.0mm 1.25m	2.00	92 125 300		
	15.0mm 1.50m 15.0mm 1.75m	2.40 2.80	92 150 300 92 175 300		
	15.0mm 2.00m	3.20	92 200 300		
	15.0mm 2.25m	3.60	92 225 300		
	15.0mm 2.50m 15.0mm 2.75m	4.00 4.40	92 250 300 92 275 300		
	15.0mm 3.00m	4.80	92 300 300		

