

Lichtgewicht bekisting VARIMID

Tried and tested system designed for forming where use of a crane is limited.

Compleet lichtgewicht systeem inclusief accessoires, voor perfecte vormprestaties op bouwplaatsen met beperkt gebruik van een kraan. Hoog draagvermogen, lange levensduur en kosteneffectieve oplossing. Draagvermogen 60 kN / m². Toepasbaar voor Wandbekisting (grote en kleine muren), Kolombekisting, funderingsbekisting.

Hoog draagvermogen:

- 60 kN / m² druk van vers beton tot 3,00 m;
- Kan verticaal worden gestapeld tot 6.00 m met gebruik van één verbinding;
- Hoogwaardig multiplex met filmlaag, dikte 15 mm. Gewicht film 240 g / m².

Cost-effective

- Minimalisering gebruik van een kraan;
- Hoog aantal gebruikscycli, dus lagere vervolgkosten;
- Vermindering van uitgaven door middel van restauratie en schoonmaak;
- Gegalvaniseerde of gepoedercoate stalen frames, voor een lange levensduur;
- Hoge kwaliteit vers beton minimaliseert afwerkingswerkzaamheden.

Eenvoudige bediening en planning:

- Connectoren en accessoires kunnen eenvoudig in sleuven worden bevestigd en snel worden vastgedraaid, waardoor de efficiëntie van vormingstijd wordt gemaximaliseerd;
- De innovatief gecoördineerde paneelbreedtes maken een optimale aanpassing aan elke constructie mogelijk.

Safe use / Veilig gebruik:

- Accessoires zoals - hijshaken, muurbeugels, steunbalken enz. Zorgen voor een veilige en gemakkelijkere bediening van het systeem.

Areas of use of the Varimid system:

- Wall formwork
- Column formwork
- Foundation formwork




VARIMID panels

The heights and widths of the Varimid panels result in a logical and advantageous increment-grid. Small amount of different panels' sizes makes planning easier and forming faster.

- 8 widths of panel
- 4 heights of panel


STANDARD PANELS

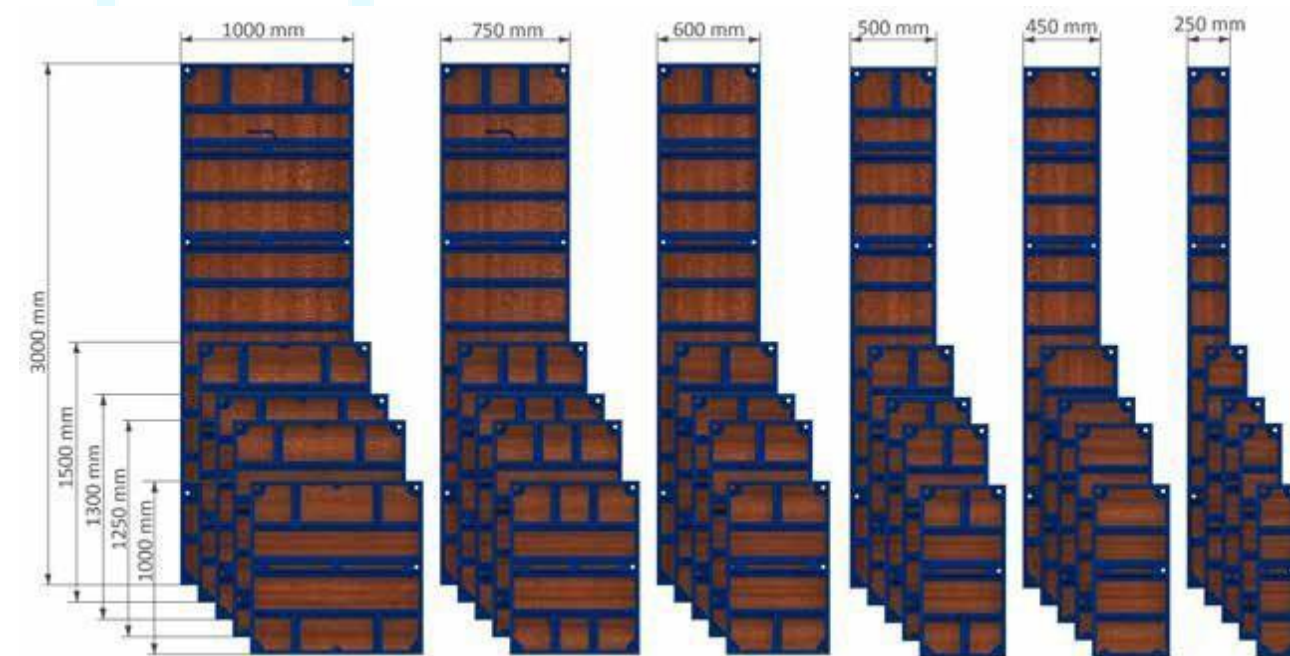


VERSATILE PANELS

The special hole pattern makes these panels particularly suitable for efficient forming of:

- Corners
- Wall junctions
- Stop-ends
- Columns

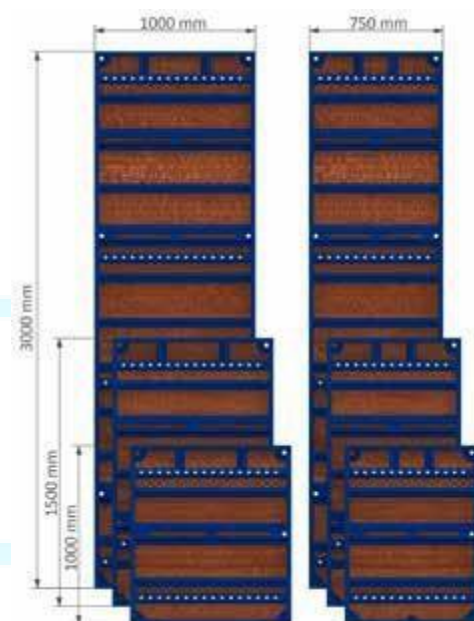

MODULE PANELS

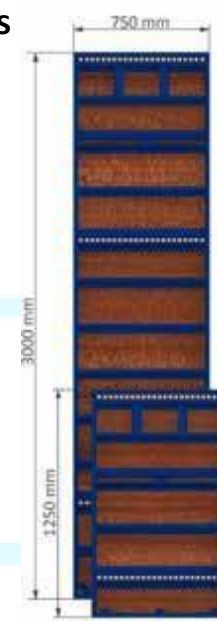

For any type and size of the panel two options of covering are available.




Galvanized

Powder-coated


STRIPPING CORNER

The Varimid stripping corner was specifically designed for use with shaft formwork. It enables the formwork to be closed and opened in accordance with accident protection regulations, i.e. without using the crane, simply by operating easy-to-turn spindles with a reinforcement rod or the convenient ratchet. It is then lifted and reset in one piece, thus saving crane-time. The Varimid stripping corner is also suitable for use on pilasters and as an inside corner on wall formwork.

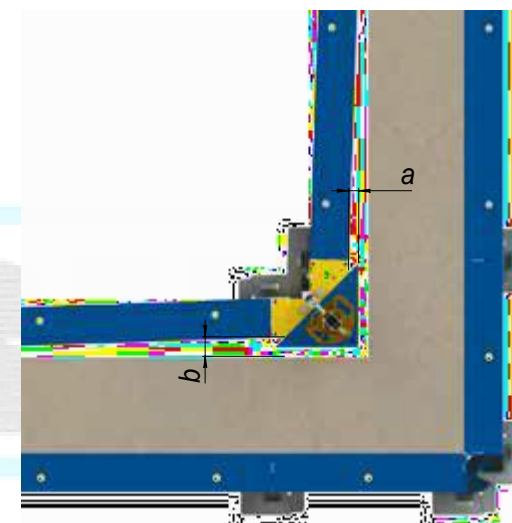


JOINING

Thanks to a continuous slot placed all along the panel's profile, the Varimid clamp device can be installed in any desired point, simply with a blow of the hammer. This makes assembly super-fast and no special tools required.











CLOSURES

















Closures are intended to be used for places where formwork cannot be struck easily. Filled with construction timber, tighten with use of an adjustable clamp device.



VARIMID


VARIMID

Item	[kg]	Article no	Item	[kg]	Article no		
Standard panel Varimid 	1000x3000mm	131.25	12100000	Multipurpose panel Varimid 	750x3000mm	111.30	12108000
	750x3000mm	107.00	12110000		750x1500mm	62.40	12208000
	600x3000mm	85.15	12112000		750x1000mm	43.00	12308000
	500x3000mm	80.85	12114000				
	450x3000mm	73.50	12116000				
	250x3000mm	60.90	12118000				
	1000x1500mm	73.17	12200000				
	750x1500mm	59.35	12210000				
	600x1500mm	46.41	12212000				
	500x1500mm	43.85	12214000				
	450x1500mm	37.02	12216000				
	250x1500mm		12218000				
	1000x1000mm	48.48	12300000				
	Options available: xxxxx 000 - Powder coated; xx xxx 100 - Galvanized; xx xxx 200 - Hot Dip Galvanized; Custom size on inquiry;				Options available: xx xxx 000 - Powder coated; xx xxx 100 - Galvanized; xxxxx 200 - Hot Dip Galvanized; Custom size on inquiry;		
750x1000mm	39.70	12310000	External angle Varimid 	117x3000mm	39.38	12614000	
600x1000mm	34.60	12312000		117x1500mm	20.05	12624000	
500x1000mm	29.55	12314000		117x1000mm	13.08	12634000	
450x1000mm	26.06	12316000					
250x1000mm	19.22	12318000					
Versatile panel Varimid 	900x3000mm	131.20	12102000				
	750x3000mm	114.45	12106000				
	900x1500mm	71.90	12202000				
	750x1500mm	65.42	12206000				
	900x1000mm	51.46	12302000				
750x1000mm	46.63	12306000					
Options available: xxxxx 000 - Powder coated; xx xxx 100 - Galvanized; xxxxx 200 - Hot Dip Galvanized; Custom size on inquiry;			Options available: xx xxx 000 - Powder coated; xx xxx 200 - Hot Dip Galvanized; Custom size on inquiry;				
Stop end panel Varimid 	900x3000mm	131.53	12104000	Internal angle Varimid 	250x3000mm	74.55	12610000
	900x1500mm	71.88	12204000		250x1500mm	39.13	12620000
	900x1000mm	53.68	12304000		250x1000mm	25.19	12630000
Options available: xxxxx 000 - Powder coated; xx xxx 100 - Galvanized; xxxxx 200 - Hot Dip Galvanized; Custom size on inquiry;			Options available: xxxxx 000 - Powder coated; xx xxx 200 - Hot Dip Galvanized; Custom size on inquiry;				
Expansion block Varimid 	1000	19,76	12 704 000	Joint angle Varimid 	250x3000mm	99.75	12 612000
	3000	54,14	12 700 000		250x1500mm	48.71	12 622000
					250x1000mm	22.20	12632000
Options available: xxxxx 000 - Powder coated; xx xxx 200 - Hot Dip Galvanized; Custom size on inquiry;			Options available: xx xxx 000 - Powder coated; xx xxx 200 - Hot Dip Galvanized; Custom size on inquiry;				

Item	[kg]	Article no	Item	[kg]	Article no		
Guide plate 	0.9 m	12.18	11912000	Wall bracket Varimid 	12.30	12720000	
	1.5 m	19.95	11914000				
Cornerguide plate 	600x600	16.50	11916000	Supporting strut 340 	35,60	11928100	
Adjustable clamp Varimid 	120	4,95	12712100	Supporting strut 540 	54,20	11930100	
Clamp device Varimid 		2,00	12710100				
Contact device 		1,40	11918100				
Connectionscrew 	10-16cm	0,65	11908100	Super plate 15.0 	15	1,22	
	10-25cm	0,70	11910100				
Stop end tie Varimid 	265mm	1,25	12714100	Star-shaped nut 		0,38	
	415mm	1,50	12715100				
Lifting hook Varimid 	0,5t	7,25	12718000	Plastic cone 	22	0,005	
					32	0,008	
Supporting strut 250 		21,85	12722100	Plastic tube 2,5m 		0,45	
					15.0mm 0.50m	0.80	92 050 300
					15.0mm 1.00m	1.60	92 100 300
					15.0mm 1.25m	2.00	92 125 300
					15.0mm 1.50m	2.40	92 150 300
					15.0mm 1.75m	2.80	92 175 300
					15.0mm 2.00m	3.20	92 200 300
					15.0mm 2.25m	3.60	92 225 300
					15.0mm 2.50m	4.00	92 250 300
					15.0mm 2.75m	4.40	92 275 300
					15.0mm 3.00m	4.80	92 300 300

WALLFORMWORKSYSTEM

WALLFORMWORKSYSTEM

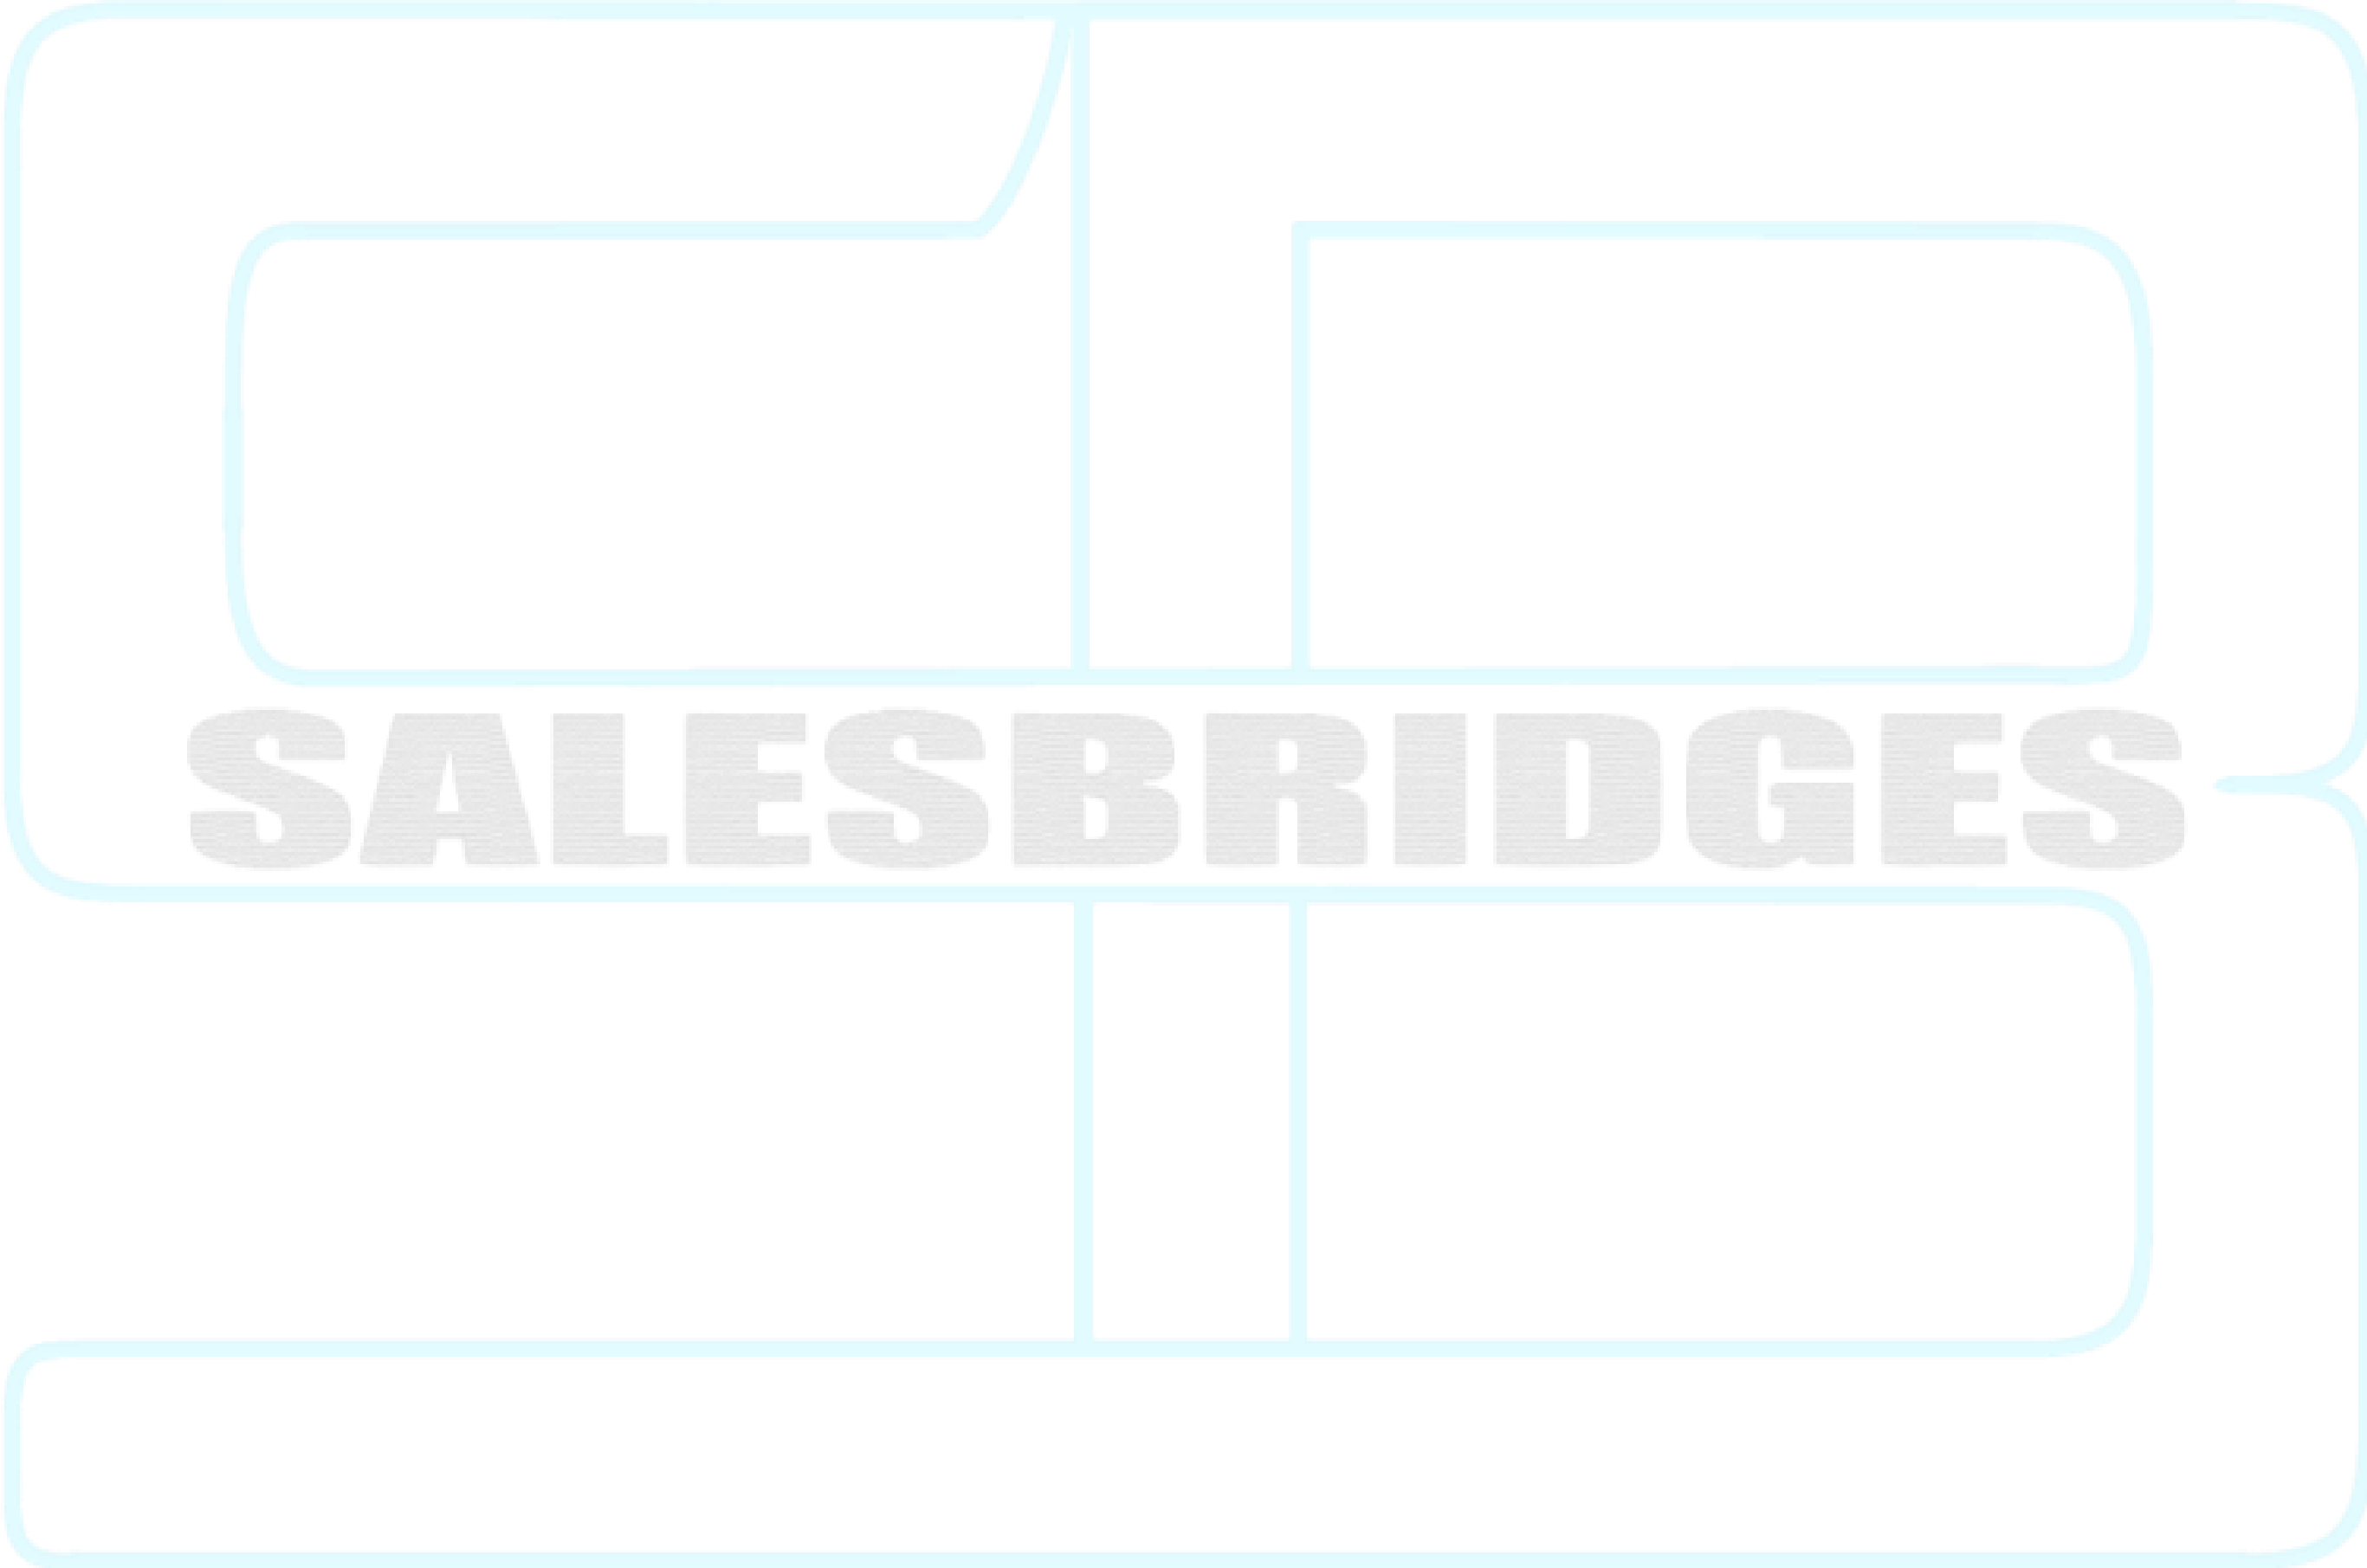

SALESBRIDGES